

New Flame Retardant Nylatron® 66 SA FR - DIN EN 45545-2 and UL94 V0 Tested Thermoplastic

A Whole New Set of Opportunities and Benefits for Industrial Applications



Challenge

Fire incidents in industrial and domestic environments are often caused by electrical equipment failures like overload, sparks or short-circuits. To prevent the risk of ignition and diffusion of flames, fire resistant materials like concrete, steel or ceramics are used. Once ignited however, the materials in the environment determine how quickly the flames spread, the level of smoke generation, and the time available to control the fire - or allow time to leave the scene. Nearly all organic materials become fuel for the fire. Plastics by definition are based on crude oil or similar organic materials and combust easily.

Opportunities

To increase the safety level and broaden the application opportunities of the use of plastics, flame retardant plastic materials have been developed. Flame retardant materials are defined by various testing methods and standards, which usually determine the self-extinguishing properties under certain conditions. Flame retardant properties can be achieved through specific formulation of the plastic compounds and the selection of the right processing method.

Quadrant's Added Value

General Engineering Plastic stock shapes manufactured in the extrusion process are generally difficult to adjust to flame retardant properties. Quadrant's polymer processing expertise and best-in-class-technologies made the development of the new Nylatron® 66 SA FR (Flame Retardant) material possible. It is a multi-purpose flame retardant material according to UL94 V0 that is available in sheets up to 100 mm thickness and rods up to 150 mm diameter.

Why flame retardant materials?

- Time to escape is critical
- Flame retardant materials buy time
- Many factors influence the survival time


Nylatron® 66 SA FR Special Characteristics

- Ertalon® 66 SA based (PA 66) universal flame retardant product
- Flame retardancy UL94 V0 at 1 – 3mm wall thickness
- Compliant with EN 45545-2:2013 R24:HL3 and R26:HL3 for rail applications
- Mechanical property profile similar Ertalon® 6PLA
- Absence of heavy metals and halogens – RoHS compliant
- Parts manufactured from Nylatron® 66 SA FR can be disposed according WEEE
- Fully compliant with REACH
- Low moisture absorption

Property Overview - Comparison to “Standard” Nylons

	Nylatron® 66 SA FR	Ertalon® 6 SA	Ertalon® 6 PLA
Tensile Stress	+	0	+
Coefficient of Linear Thermal Expansion	+	0	+
Charpy	0	+	0
HDTa	+	0	+
Permanent Temperature	0	0	+
Maximum Temperature	+	0	+

Quadrant’s Portfolio of DIN EN 45545-2 Tested Materials (highlighted in red)

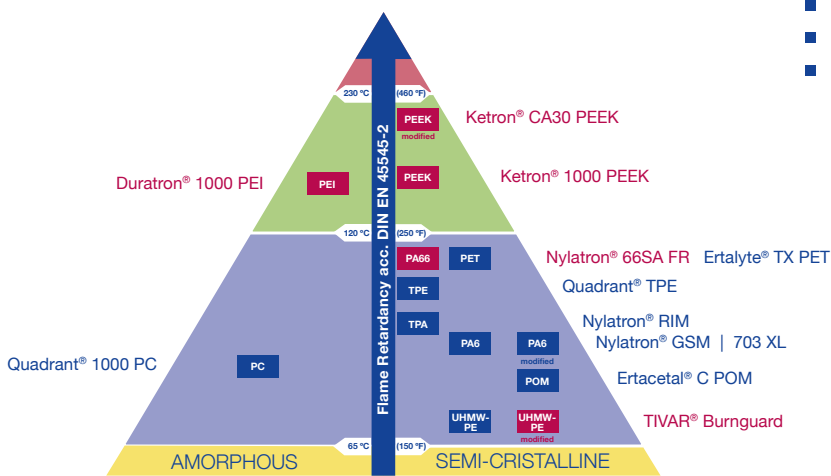

Typical Applications

- Cable holders
- Cable clamps
- Cable channels
- Connectors



Quadrant Engineering Plastic Products

Europe

Quadrant EPP Europe N.V.
Galgenveldstraat 12
8700 Tielt, Belgium
T +32[0] 51 42 35 11
F +32[0] 51 42 33 10
contact@qplas.com

North America

Quadrant EPP USA, Inc.
2120 Fairmont Avenue
PO Box 14235 - Reading, PA 19612-4235
T 800 366 0300 | +1 610 320 6600
F 800 366 0301 | +1 610 320 6638
americas.epp@qplas.com

Asia-Pacific

Quadrant EPP Asia Pacific Ltd
60 Ha Mei San Tsuen, Ping Shan
Yuen Long - NT Hong Kong
T +852 24702683
F +852 24789966
asia.epp@qplas.com

This brochure and any data and specifications presented here or on our website shall provide promotional and general information about the Engineering Plastic Products (the „Products“) manufactured and offered by Quadrant Engineering Plastic Products („Quadrant“) and shall serve as a preliminary guide. All data and descriptions relating to the Products are of a general informational nature only. Neither this brochure nor any data and specifications presented on our website shall create or be implied to create any legal or contractual obligation. This brochure and any data or specifications herein do not create expressly or by implication any legal, contractual or warranty obligation whatsoever. No warranty of any kind, either express or implied, is made as to the information contained in these pages, including, but not limited to, all warranties provided for by Louisiana law, any implied warranty of merchantability, of fitness for a particular purpose, and any warranty against hidden defects or redhibitory defects or vices. No information in this brochure creates any express or implied warranty that the goods described here in shall conform to any description herein. Quadrant sells the products described herein solely to sophisticated users and not to consumers, and Quadrant assumes no responsibility that any goods described herein will be fit for any particular purpose for which a Quadrant customer may determine to purchase such goods, except and to the sole extent otherwise provided in a separate written contract.

Any illustration of the possible fields of application of the Products shall merely demonstrate the potential of these Products, but any such description does not constitute any kind of covenant or warranty whatsoever. Irrespective of any tests that Quadrant may have carried out with respect to any Product, Quadrant does not possess expertise in evaluating the suitability of its materials or Products for use in specific applications or products manufactured or offered by the customer respectively. It thus remains the customer’s sole responsibility to test and assess the suitability and compatibility of Quadrant’s Products for its intended applications, processes and uses, and to choose those Products that according to its assessment meet the requirements applicable to the specific use of the finished product. The customer undertakes all liability in respect of the application, processing or use of the aforementioned information or product, or any consequence thereof, and shall verify its quality and other properties.

Duratron®, Ertacetal®, Ertalon®, Ertalyte®, Ketron®, Nylatron®, Quadrant® and TIVAR® are registered trademarks of the Quadrant Group.